


FASTENERS:  
 USE 8d CORROSION  
 RESISTANT BOX NAILS OR  
 MIN #9 CORROSION  
 RESISTANT SCREWS  
 (COLOR COORDINATED)

**CLOSED VALLEY**

DECRA ROOFING PANEL:  
 CUT AND BEND DOWN  
 INTO VALLEY

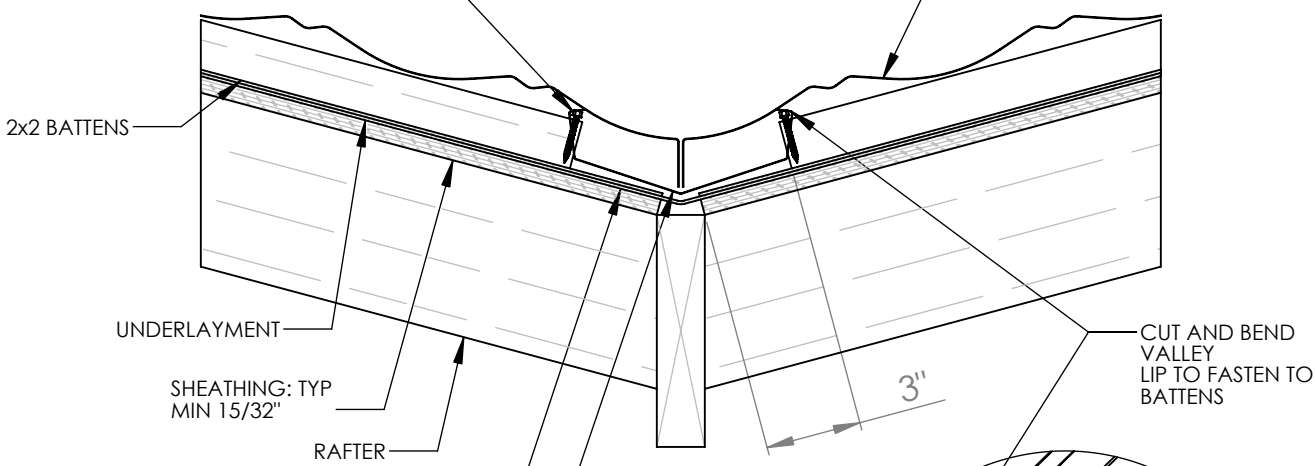

2x2 BATTENS

UNDERLAYMENT

SHEATHING: TYP  
 MIN 15/32"

RAFTER

3"

CUT AND BEND  
 VALLEY  
 LIP TO FASTEN TO  
 BATTENS

ADDITIONAL  
 LAYER OF  
 UNDERLAYMENT  
 UNDER FIELD  
 UNDERLAYMENT

VALLEY METAL  
 NO. 26 GAUGE ALUMINUM,  
 GALVANIZED OR  
 GALVALUME VALLEY METAL

UNDERLAYMENT

SHEATHING: TYP  
 MIN 15/32"

RAFTER

BATTENS:

2x2 NOMINAL WOOD OR STEEL  
 HAT SECTIONS SUFFICIENT TO  
 SPAN RAFTER SPACING.

WOOD BATTENS FASTENED TO  
 DECK WITH 16d COMMON NAILS.

STEEL HAT SECTIONS FASTENED  
 TO DECK WITH MIN #9x1-1/2"  
 CORROSION RESISTANT SCREWS.

3"

**OPEN VALLEY**

TITLE  
**Valley - Tile and Shake**

DRAWING No.  
**ARCH2003-1-07**

**DECRA ROOFING SYSTEMS, INC.**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF  
**DECRA ROOFING SYSTEMS, INC.** ANY REPRODUCTION IN PART OR IN WHOLE  
 WITHOUT PRIOR APPROVAL AND WRITTEN PERMISSION IS PROHIBITED.

1230 RAILROAD ST. CORONA, CA 92882 PH (951)272-8180 Fax (951)272-4476

DATE: **03-29-13**

SCALE: **2" = 1' 0"**