


DECRA SHAKE HIP & RIDGE

HIP

2x2 BATTEN

FASTENERS:
USE 8d CORROSION
RESISTANT BOX NAILS OR
MIN #9 CORROSION
RESISTANT SCREWS
(COLOR COORDINATED)

DECRA SHAKE PANEL:
BEND UP 2" AGAINST HIP BATTEN

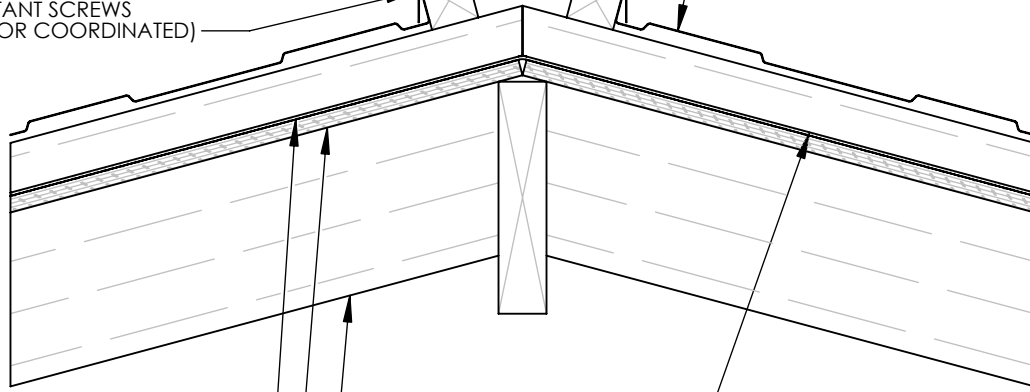

UNDERLAYMENT

SHEATHING: TYP
MIN 15/32"

RAFTER

BATTENS:

2x2 NOMINAL WOOD OR STEEL
HAT SECTIONS SUFFICIENT TO
SPAN RAFTER SPACING.

WOOD BATTENS FASTENED TO
DECK WITH 16d COMMON NAILS.


STEEL HAT SECTIONS FASTENED
TO DECK WITH MIN #9x1-1/2"
CORROSION RESISTANT SCREWS.

DECRA SHAKE HIP & RIDGE

RIDGE

STACKED 2x2 BATTENS

FASTENERS:
USE 8d CORROSION
RESISTANT BOX NAILS OR
MIN #9 CORROSION
RESISTANT SCREWS
(COLOR COORDINATED)

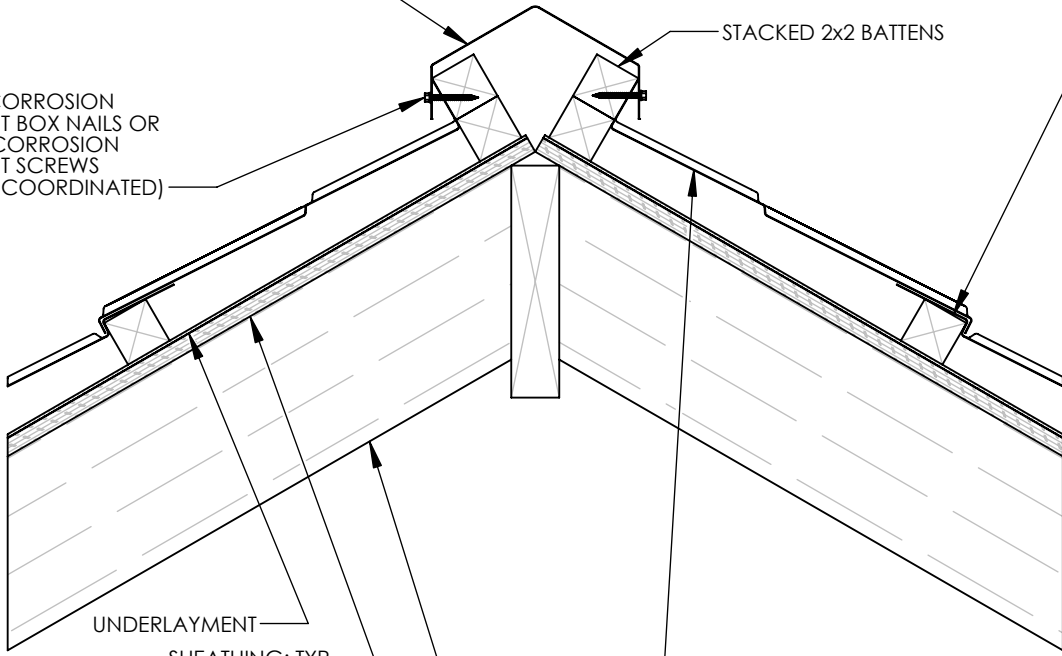

UNDERLAYMENT

SHEATHING: TYP
MIN 15/32"

RAFTER

DECRA SHAKE PANEL:
BEND UP 2" AGAINST RIDGE BATTEN

TITLE

Hip and Ridge- Shake

DRAWING No.

ARCH2003-1-08b

DECRA ROOFING SYSTEMS, INC.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
DECRA ROOFING SYSTEMS, INC. ANY REPRODUCTION IN PART OR IN WHOLE
WITHOUT PRIOR APPROVAL AND WRITTEN PERMISSION IS PROHIBITED.

1230 RAILROAD ST. CORONA, CA 92882 PH (951)272-8180 Fax (951)272-4476

DATE: **03-29-13**

SCALE: **2" = 1' 0"**