


INSTALL 2x2 BATTEN PARALLEL WITH RIDGE
 POSITION IS DETERMINED BY LENGTH OF
 TRANSITION PANEL AND ROOF PITCH

FASTENERS:
 USE 8d CORROSION
 RESISTANT BOX NAILS OR
 MIN #9 CORROSION
 RESISTANT SCREWS
 (COLOR COORDINATED)

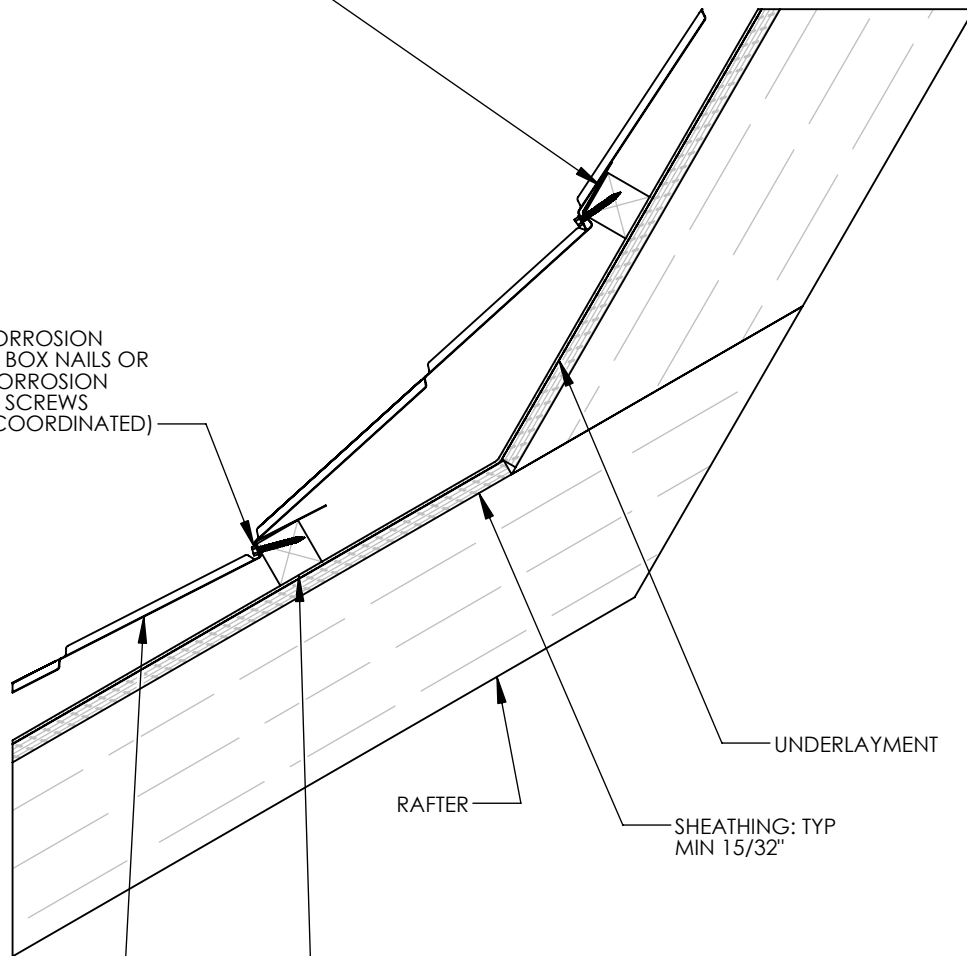

DECRA ROOFING PANEL

BATTENS:
 2x2 NOMINAL WOOD OR STEEL
 HAT SECTIONS SUFFICIENT TO
 SPAN RAFTER SPACING.
 WOOD BATTENS FASTENED TO
 DECK WITH 16d COMMON NAILS.
 STEEL HAT SECTIONS FASTENED
 TO DECK WITH MIN #9x1-1/2"
 CORROSION RESISTANT SCREWS.

TITLE
Pitch Change- Low to High - Tile and Shake

DRAWING No.
ARCH2003-1-10a

DECRA ROOFING SYSTEMS, INC.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
DECRA ROOFING SYSTEMS, INC. ANY REPRODUCTION IN PART OR IN WHOLE
 WITHOUT PRIOR APPROVAL AND WRITTEN PERMISSION IS PROHIBITED.

1230 RAILROAD ST. CORONA, CA 92882 PH (951)272-8180 Fax (951)272-4476

DATE: **04-01-13**

SCALE: **2" = 1' 0"**